


"P-DYG" SERIES FILTERS

POOL FILTERS

Features:

- Easy to install.
- filtration system is equipped with the most optimal combination of our filter and pump.
- Injection-molded mounting base makes filtration system work more stable.
- Unitized thermal plastic filter tank, tough, durable and suitable for many different weather condition.
- Circulation pump with good performance, corrosion-proof and quiet.

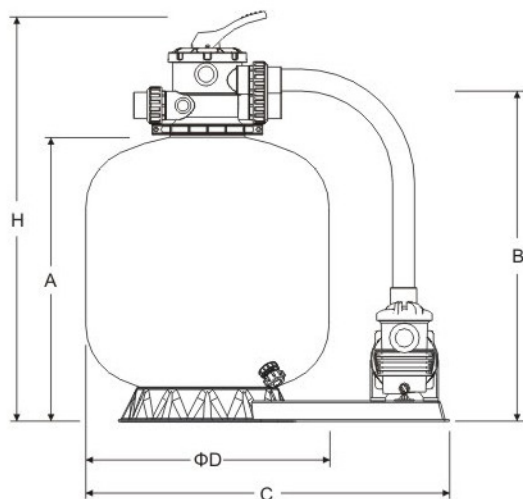

ΦD(mm)	350	410	450	535	635
H(mm)	750	770	830	870	970
A(mm)	495	515	575	615	715
B(mm)	545	565	625	665	765
C(mm)	570	570	770	770	770




Standard: plastic clamp



Optional: stainless steel clamp

QH.Curve of The Pump

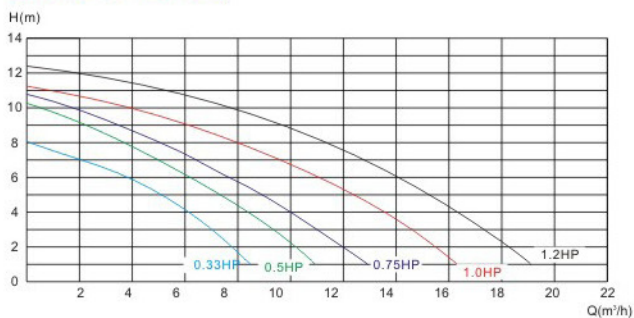

Model	Pipe Size (inches)	Filter Area (m²)	Design Flow (m³/h)	0.5-0.8mm Sand Weight (kg)	Tank Volume (m³)	Tank Weight (kg)	Valve Weight (kg)	Matching Pump (HP)
P-DYG350	1.5	0.10	4.50	25	0.06	4.0	3	ESP033M
P-DYG400	1.5	0.13	6.50	34	0.09	5.0	3	ESP033M
P-DYG450	1.5	0.16	8.00	50	0.15	6.5	3	ESP050M
P-DYG500	1.5	0.23	11.50	80	0.20	9.2	3	ESP100M
P-DYG650	1.5	0.32	16.00	160	0.32	12.1	3	ESP120M

MAXIMUM WORKING PRESSURE: 36psi/2.5kg/cm² (PLASTIC CLAMP)

MAXIMUM OPERATING WATER TEMPERATURE ≤ 50°C