


“WL-GB” SERIES FILTERS

POOL FILTERS

Features:

- Easy to install.
- filtration system is equipped with the most optimal combination of our filter and pump.
- Injection-molded mounting base makes filtration system work more stable.
- Unitized thermal plastic Inner Tank with Fiberglass Twining Around outside, Much more strong, durable and suitable for many different weather condition.
- Circulation pump with good performance, corrosion-proof and quiet.

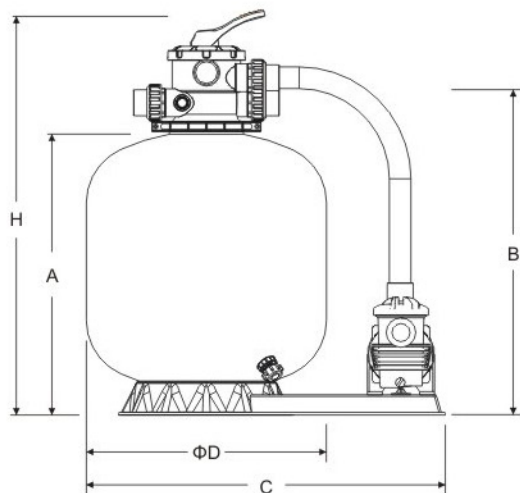


Standard: plastic clamp



Optional: stainless steel clamp-
maximum working pressure:50psi

ΦD(mm)	350	410	450	535	635
H(mm)	750	770	830	870	970
A(mm)	495	515	575	615	715
B(mm)	545	565	625	665	765
C(mm)	570	570	770	770	770

QH.Curve of The Pump

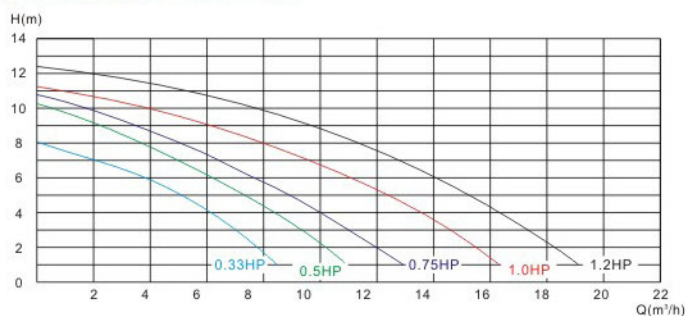

Model	Pipe Size (inches)	Filter Area (m²)	Design Flow (m³/h)	0.5-0.8mm Sand Weight (kg)	Tank Volume (m³)	Tank Weight (kg)	Valve Weight (kg)	Matching Pump (HP)
WL-GB350	1.5	0.10	4.50	25	0.06	4.5	3	ESP-033M
WL-GB400	1.5	0.13	6.50	34	0.09	5.5	3	ESP-033M
WL-GB450	1.5	0.16	8.00	50	0.15	7.0	3	ESP-050M
WL-GB500	1.5	0.23	11.50	80	0.20	9.8	3	ESP-100M
WL-GB650	1.5	0.32	16.00	160	0.32	13.0	3	ESP-120M

STANDARD: MAXIMUM WORKING PRESSURE: 36psi/2.5kg/cm²

MAXIMUM OPERATING WATER TEMPERATURE≤50°C

MAXIMUM TESTING PRESSURE:60psi